




why! Replacing N240JU WLAN Card

Written By: Felice Suglia





Step 1 — accumulator

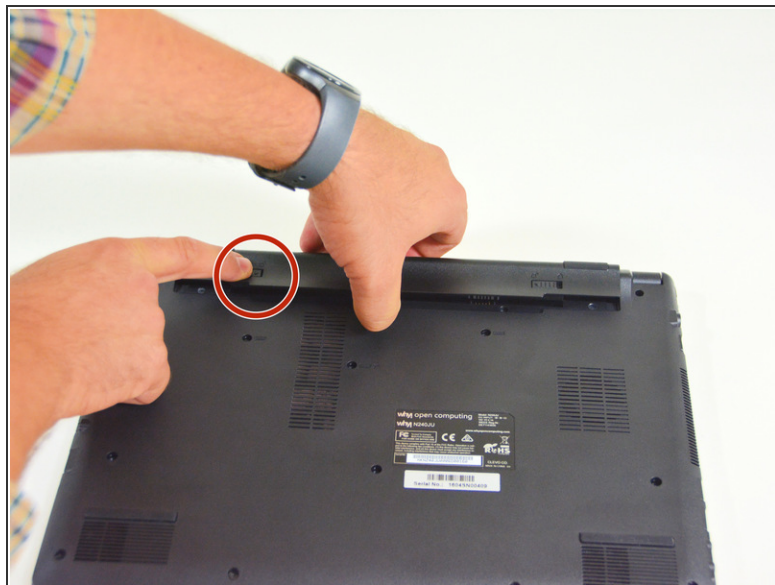


- First open the latch on the left side.
- Then remove the accumulator with simultaneously open latch on the left side.

Step 2 — Access to major components

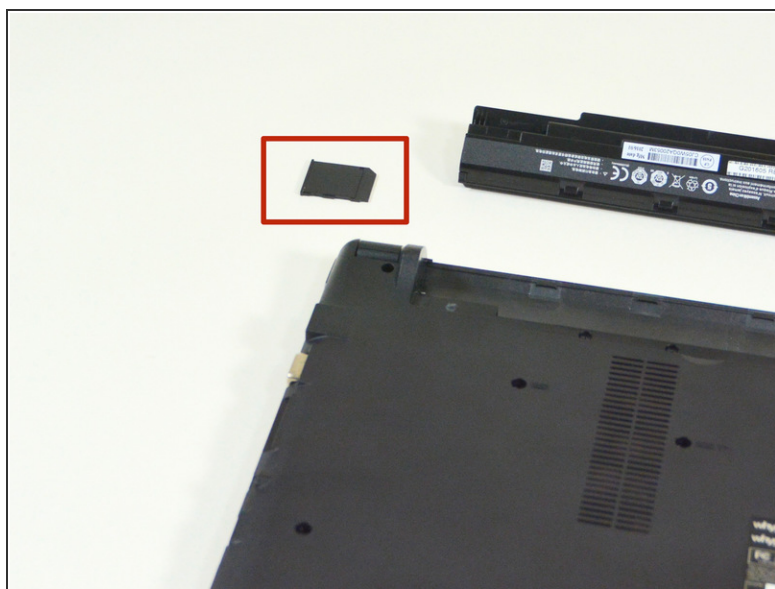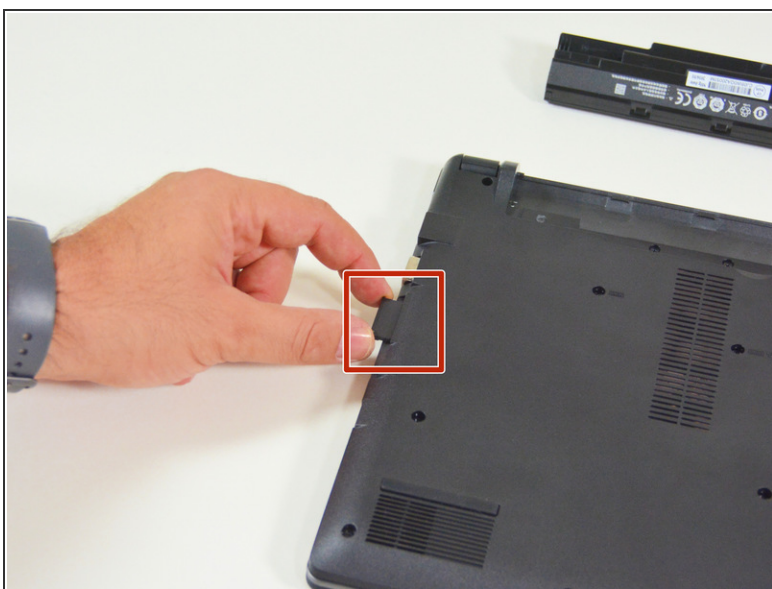


- Places first imitated memory card.
- Then remove this counterfeit card and put it down on your desk.

Step 3

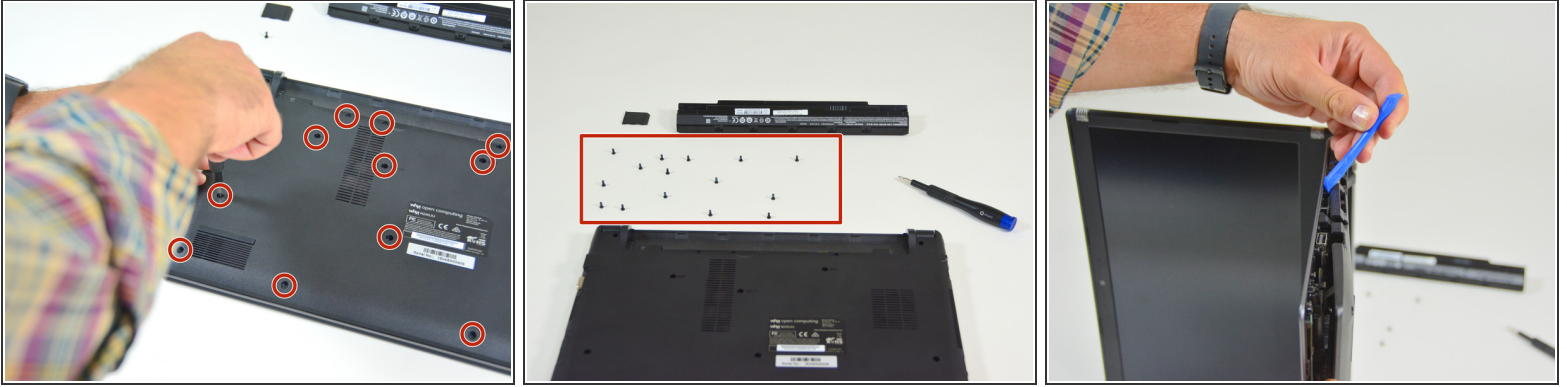

- Places you are holding the 15 screws the bottom cover of the computer.
- And then loosen these screws and put them onto your workplace.
- Loosen danacch the fortifications of the lower cover as shown in this step Figure 3.

Step 4 — WLAN card

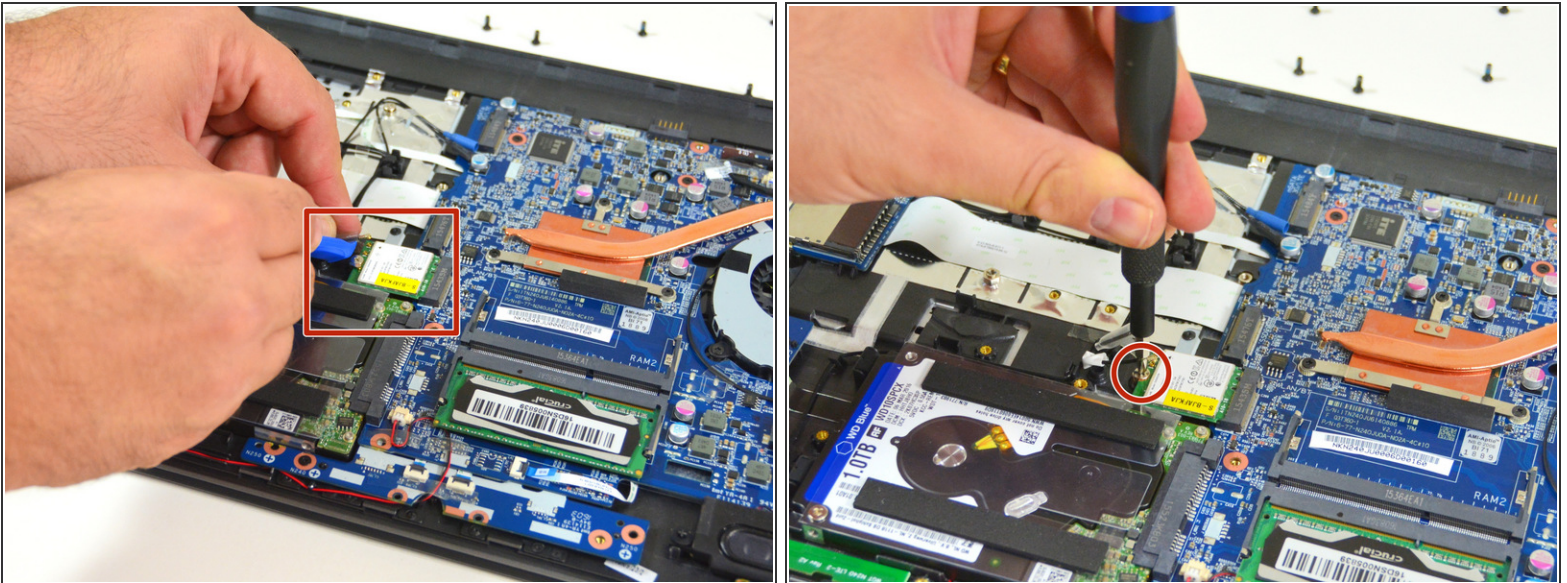

- Loosen carefully the antenna connector MAIN and AUX.
- Loosen the fastening screw with the Philips screwdriver and remove the WLAN card from its cord.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

